

General Description

The TEL1-PCM single-channel telemetry system offers the easiest handling for the wireless transmission of strain gage signals from rotating shafts. The very small encoder is available in two sizes. Housing1 = 70 x 18 x 8 mm (Standard) or housing2= 35 x 18 x 12 mm (on request). Each has a weight of 13g. The transmitter (encoder) part is simply mounted on the rotating shaft with a special fiber reinforced tape.

The data transfer between transmitter and receiver is digital. The powering of the transmission part by the TEL1-PCM BATT is supplied by 6-9V battery.


Functional Description

The TEL1-PCM-BATT transmitter provides a pulse code modulated signal (PCM) to an induction winding around the shaft. The magnetic field of this winding enables the inductive transmission of the signal from coil to pickup. From there the signal is transferred by cable (5 m) to the receiver. The maximum distance between the transmitter coil and the pickup is 150mm.

The receiver unit offers a BNC connector at the front panel with analog outputs ± 10 V and a optional a digital output for PCM interface ECIA100 (for notebooks) or IF16 (PCI Desktop). An LED bar indicator shows the actual level and a successful Auto Zero calibration. Overload is indicated by the last LED's in pos. or neg. direction of the bar graph. These OVL-LED's operate in peak-hold mode and are reset by pressing the overload switch.

Strain gage sensors (>350 Ohm) in full- and half- bridge configuration can be directly connected to the transmitter. The excitation is fixed to 4 Volt DC and the gain is set by the gain switch on the receiver side. An auto-zero (AZ) adjustment is executed by pressing the AZ button on the front side of the receiver. The successful AZ operation is indicated by a yellow LED in the middle of the LED bar indicator. The yellow LED flashes as long as the AZ is in progress. When the AZ completes the LED continuously illuminates. A continued flashing of the yellow LED indicates some error in the AZ electronics. In this case please contact the support of KMT. Additional to the AZ you have the possibility to calibrate the bridge by external shunt. (+ and -). The AZ setting is stored in a Flash-RAM and thus is not lost during power-off. Use only shielded sensor cable.

TEL1-PCM-BATT Set Contains:

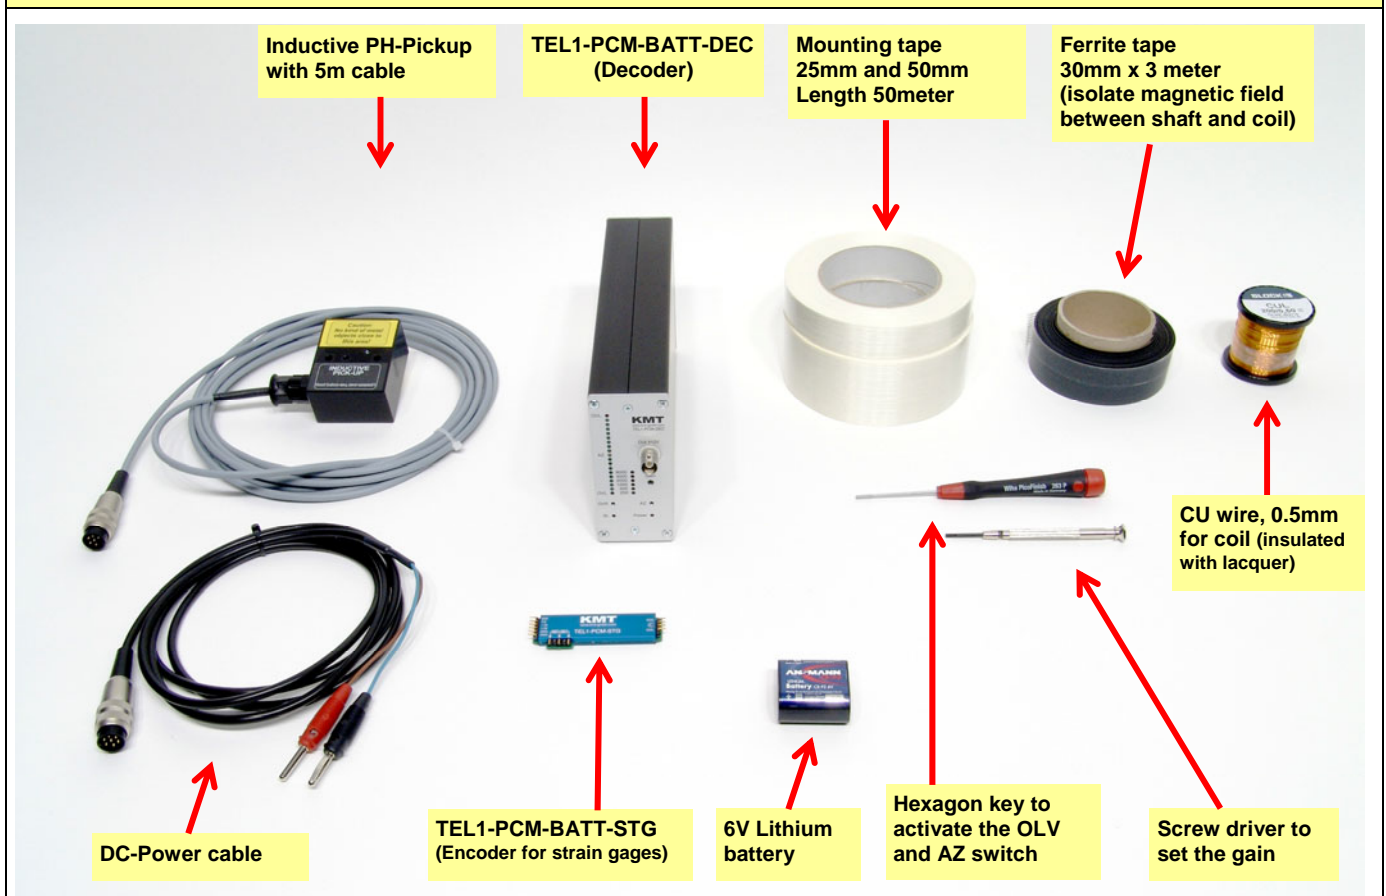

Technical Data



Housing 1 (70 x 18 x 8 mm)
Standard housing for battery version



Housing 2 (35 x 18 x 12 mm)
Only on request!

TEL1-PCM-STG-BATT

Strain gauge: Full and 1/2 bridge >350 Ohm,

Excitation: 4 VDC (fixed)

Gain: 250; 500; 1000; 2000; 4000; 8000 (selectable from receiver side)

Gain	Resolution	Autozero range
250	12 bit	100%
500	12 bit	200%
1000	12 bit	400%
2000	12 bit	400%
4000	12 bit	400%
8000	11 bit	400%

Shunt Cal: Via external resistor for positive and negative calibration

Analog signal bandwidth: 0 - 1200 Hz (-3 dB)

Operating temperature: - 10 to + 80 °C

Scanning rate 7.5kHz

Dimensions: 70 x 18 x 8mm (without connectors)

Weight: 13 grams

Static acceleration: up to 1000g

TEL1 PCM BATT Powering: By battery 6-9V

Power consumption: 70mA

Housing: splash-water resistant (except the connector pins)




Analog signal bandwidth: 0 - 10 Hz (-3 dB)
Accuracy: +/-0.5 % (without sensor)
Operating temperature: - 10 to + 80 °C
Dimensions: 35 x 18 x 12mm (without connectors)
Weight: each module 13 grams
Static acceleration: up to 3000g
TEL1 PCM BATT Powering: By battery 6-9V
Housing: splash-water resistant IP65 (except the connector pins)

TEL1-PCM-TH-K-BATT

°C	Calibrator out (mV)	Output at receiver (DEC)		
		Normal (V)	Min. (V)	Max. (V)
0	-1.203	0,06	0,01	0,11
50	0.820	0,50	0,45	0,55
100	2.893	1,00	0,95	1,05
150	4.935	1,50	1,45	1,55
200	6.935	1,98	1,93	2,03
250	8.950	2,46	2,41	2,51
300	11.005	2,98	2,93	3,03
350	13.090	3,45	3,40	3,50
400	15.194	3,95	3,90	4,00
450	17.313	4,46	4,41	4,51
500	19.441	4,96	4,91	5,01
550	21.573	5,47	5,42	5,52
600	23.702	5,99	5,94	6,04
650	25.822	6,49	6,44	6,54
700	27.926	6,99	6,94	7,04
750	30.010	7,49	7,44	7,54
800	32.072	7,99	7,94	8,04
850	34.110	8,46	8,41	8,51
900	36.123	8,94	8,89	8,99
950	38.110	9,42	9,37	9,47
1000	40.072	9,90	9,85	9,95


Calibrator OMEGA CA71S3, measure at a clamping point temperature of 30°C (after 30 min run time)

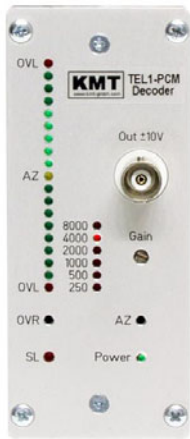

Front side



Rear side

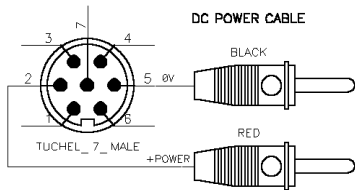

DC POWER CABLE

TEL1-PCM-DEC

Front side:

Analogue output: +/-10V via BNC (Optional 4-20mA)
 Digital output for PCM Interface IF16 (ECIA100) OPTION
 Gain setting : via screw switch
 Auto Zero setting: via micro switch
 Overload LED's (Red ON) reset: via micro switch
 Green LED's: Bargraph +/-
 Autozero LED:
 Yellow ON- successful AZ
 Yellow OFF- not successful AZ
if flashing, call support of KMT, error in EPROM
 Green LED's: Bargraph +/-
 SL LED: Red ON = if error of data transmitting
 Power ON LED: Red ON = if power switch on

Rear side:

Output to Powerhead: via 6pol. Tichel
 Fuse LED: Flashing if fuse is defect
 Powering: 10-30V DC (min. 24Watt), Input via 7pol. Tichel
 Switch: ON/OFF
 Operating temperature: - 10 to + 70 °C
 Dimensions: 200 x 105 x 44 (without connectors!)
 Weight 950 grams
 Static acceleration: upto 200g
 System accuracy*: +/- 0.2 %
*<*measure with gain 1000, 350ohm (0.1%) full bridge - test bridge!>*



TEL1-PCM-Pickup

Function:

Receiving PCM magnetic field in PCM modulated code Distance between the transmitter coil and the pickup is 5-150mm
 Output to TEL1-PCM-Decoder: Via 6pol. Tichel Plug incl. 5m cable
 Operating temperature: - 10 to + 80 °C
 Dimensions: 53x66x30mm (without cable)
 Weight: 200 grams (without cable!)
 Housing: splash-water resistant IP65 (except connector).
 Cable length standard 5m! Longer on request, but max. 50m!

Block diagram

